


ANHYDROUS AMMONIA TOOLBAR

Dalton
AG PRODUCTS



TR - Triple Rank
SHADOW series

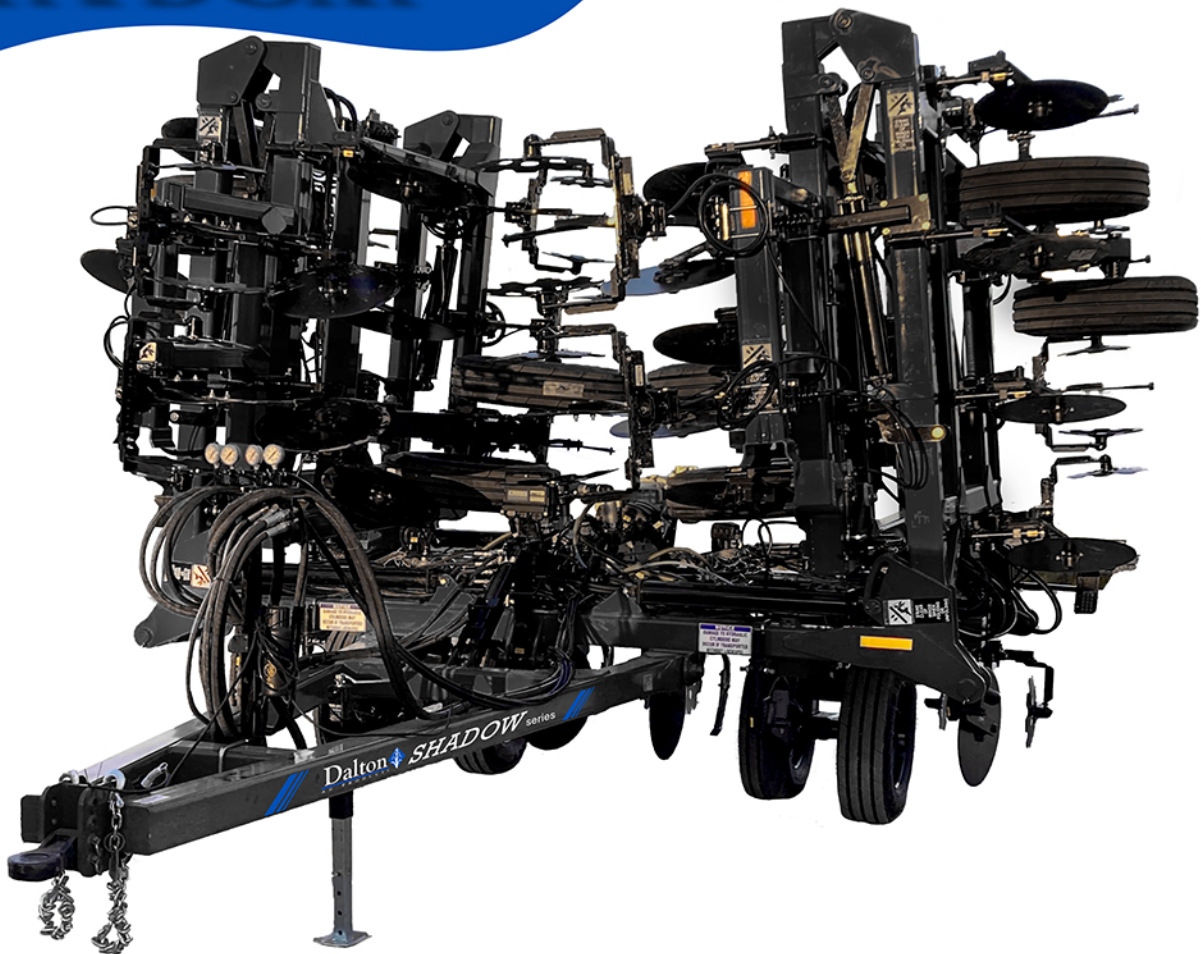

DISCOVER THE QUIET EFFICIENCY OF THE DALTON SHADOW

EXCLUSIVE IMPROVEMENTS

- ◆ 6"X6" HEAVY DUTY FRAME
- ◆ ROBUST PIN ON TONGUE
- ◆ EXTENDED LIFE EDGE BENT SHANKS
- ◆ LONG LIFE DUAL SHANK SPRING
- ◆ EXTREME DUTY SEALER HUBS
- ◆ NO MAINTENANCE WALKER PIVOTS
- ◆ SINGLE POINT DEPTH CONTROL
- ◆ SELF LEVELING REAR HITCH





DALTON AG TOOLBARS

SHADOW *SERIES*

Triple Rank (TR)

TR SERIES TOOLBAR SPECIFICATIONS	
FEATURES	
Rows	18, 20 or 24
Row Spacing	30"
Working Width	Up to 60'
Center Section Width	14'
Transport Height	14'
Transport Width	18.5'
Frame Tubing	6" x 6"
Degree of Wing Downflex	15 °
Heavy Duty Pin On Adjustable Tongue	Standard
Hitch	CAT4 Bull Pull
Telescoping/Swinging HD Self - Leveling Rear Hitch	Standard
Wing Sections	18 & 20 - Double fold 22 & 24 - Triple Fold
Quick Coupler Stand	Standard
Tires	(12) 295/75 R22.5
Axles - Lift & Gauge Wheels	Walking Tandem
Hydraulic Outboard Gauge Wheels	Hydraulic Walking Tandem
Greaseless Primary Pivot Points	Standard
Hydraulic Hose & Gauge Stand	Standard
Light Kit	Standard
HP Requirement (Typical Application)	17-20 HP per row or 300-500
2 Year Main Frame Warranty	Standard
Single Point Depth Control	Standard

Heavy Duty Row Units

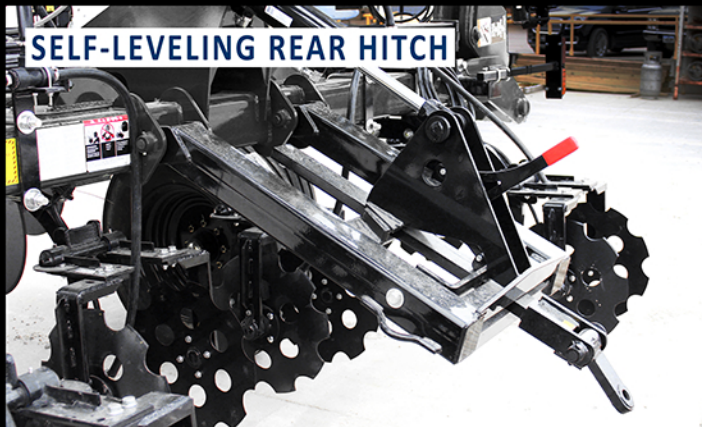

Manufactured by:

Dalton
AG PRODUCTS

MOBILITY
BY DALTON AG



602 E. Van Buren
Lenox, Iowa 50851

office@daltonag.com

1-800-342-7498

www.DaltonAg.com

SEE YOUR LOCAL DEALER

